

AKSA Power Generation has been producing industrial generator sets with an innovative compact design and excellence in quality for over 30 years. AKSA has been providing reliable power through three main production plants and over 15 branch offices worldwide.



General Characteristics

Model Name	APD125C-6	Frequency / PF	60Hz, 1800 rpm, 0.8pf
Engine Make & Model	Cummins 6BT5.9G2	Alternator Make	Stamford
Control Panel Model	DSE 6020	Base Frame / Enclosure	AKSA ASM5

Genset Rating – 60Hz, 1800rpm, 0.8pf

Engine	Alternator	Voltage	Standby Power	Prime Power	Standby Current
6BT5.9G2	UCI274C	480 / 277V	125kVA	110kVA	150A
	UCI274D	380 / 222V	125kVA	110kVA	189A
	UCI274C	220 / 127V	125kVA	110kVA	328A
	UCI274D	208 / 120V	125kVA	110kVA	346A

Stand-by Power (Maximum): Power available at variable load in the event of main power network failure. No over load is permitted.
 Prime Power: Power available at variable load in lieu of a main power network. Overload of 10% is permitted for 1 hour in every 12 hours of operation.
 The above ratings represent the engine performance capabilities to conditions specified in accordance with ISO 8528/5 & ISO3046.
Derating may be required for conditions outside of the test conditions.

Codes & Standards

- The Generator set is designed and manufactured in a facility certified to **ISO9001** standards.
- The Generator set is designed and manufactured in a facility certified to **ISO14001:2015** standards.
- AKSA Power Generation** provides **single source responsibility** for the generator set & accessories.
- The generator set, with its components, are **prototype tested** and **production tested**



*Manufacturer reserves the right to make changes in model, technical specifications, color, equipment and accessories without prior notice.



Engine Data

Manufacturer	Cummins
Model	6BT5.9G2
Displacement & Cylinders	5.9L / 6 Cylinders
Engine Speed	1800rpm
Engine Standby Power	92 kW / 123 HP
Engine Prime Power	86 kW / 115 HP
Aspiration	Turbocharged
Compression Ratio	17.3 : 1
Bore / Stroke	102 mm / 130 mm
Governor Regulation	≤ 3%
Piston Speed	6 m/s
Friction Horsepower	12.7 kW
Engine Water Flow	2.0 litre/sec.
Intake Air Flow	108 litre/sec.
Exhaust Gas Flow	280 litre/sec.
Exhaust Gas Temperature	565 °C

Electric System

Engine Cranking Motor	24V
Engine Battery Charge System	40A, Negative Ground
Battery Qty, Rating, CCA	2 x 60Ah

Cooling System

Coolant Capacity	32.9 L
Max Coolant Friction Head External to Engine -1500rpm	28 kPa
Thermostat Range	82 – 95 °C
Min Pressure Cap	69 kPa
Max Top Tank Temperature	104 °C

Exhaust System

Max Back Pressure	10 kPa
Min Exhaust Pipe Size	75 mm
Manifold Insulation	Not Acceptable
Turbocharger Insulation	Not Acceptable

Fuel System

Type of Injection	BYC A Direct Injection
Max Restriction @ Lift Pump	22 L/h
Max Allowable Head on Injector Return Line	17 L/h
Total Drain Flow	11 L/h

Air Intake System

Max Intake Air Restriction	6 kPa (Dirty Element) 4 kPa (Clean Element)
Min Dirt Holding Capacity	53 g/cfm
Max Temp Rise from Ambient to Inlet of Turbo	17 °C

Fuel Consumption

Standby Power (110%)	33.6 L/h
Prime Power (100%)	29.7 L/h
Prime Power (75%)	22.2 L/h
Prime Power (50%)	15.6 L/h
Prime Power (25%)	9.4 L/h

Lubrication System

Max Oil Temperature	121 °C
Oil Capacity : High - Low	14.2 L – 12.3 L
Min Required Lube Capacity	16.4 L

*Manufacturer reserves the right to make changes in model, technical specifications, color, equipment and accessories without prior notice.



Alternator Data

Manufacturer	Stamford
Standards	BS EN 60034
Control System	Self Excited
A.V.R.	SX460
Voltage Regulation	± 1 %
Insulation System	Class H
Protection	IP23
Rated Power Factor	0.8
Stator Winding	Double Layer Concentric
Winding Pitch	Two Thirds
Winding Leads	12
Telephone Interference	THF < 2 %
Waveform Distortion	No Load < 1.5 %
Maximum Over speed	2250 rev/min

Controller Data

Manufacturer	DSE
Model	6020
Type	Auto Mains Failure Control

Controller Features & Benefits

- Microprocessor controlled
- License free PC Software
- IP65 rating offers increased resistance to water ingress
- Front Panel Editing
- Event log
- Back-lit icon LCD display
- LED and LCD alarm indication
- Power save mode
- PC and front panel configuration
- Configurable timers and alarms

Battery Charger & Electrical System Data

Manufacturer	AKSA
Model	SmartGen BAC06A
Input Voltage	100V ~ 250V AC
Output Voltage / Current	27,6V DC / 3A

- Alternative configuration
- Three phase generator monitoring
- Current monitoring and protection
- Power monitoring (kW, kVA, kVAr)
- Reverse power (kW & kVAr) protection
- Three phase utility monitoring

Jacket Water Heater Data

Manufacturer	AKSA
Model	HTR1000W 100-120F
Input Voltage	1 ph, Based on gen voltage
Power	1000W

- Test feature
- Battery voltage monitoring
- Hours counter
- Comprehensive warning or shutdown on fault condition

*Manufacturer reserves the right to make changes in model, technical specifications, color, equipment and accessories without prior notice.


Enclosure Features



- ✓ Heavy Duty Steel Structure
- ✓ E-Stop on Enclosure
- ✓ Control Panel Eliminated from Engine Vibrations
- ✓ Control Panel Window
- ✓ Plastic Covered Corrosion Resistant Locks & Hinges
- ✓ Internally Mounted Exhaust System with Rain Cap
- ✓ Coolant Fill Cap
- ✓ Base Frame Lifting Hooks
- ✓ Base Fuel Tank and Forklift Pockets
- ✓ Easy Access for Maintenance
- ✓ Sound Absorb High Density Foam


Open Skid Gen-Set Dimensions

Length	2150 mm
Width	1000 mm
Height	1469 mm
Dry Weight	1280 kg
Tank Capacity	195 L

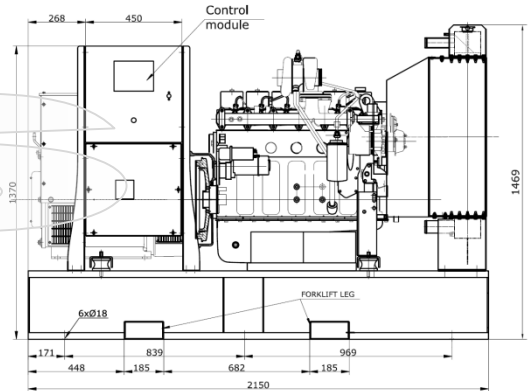

Enclosed Gen-Set Dimensions

Length	3121 mm
Width	1068 mm
Height	1716 mm
Dry Weight	1700 kg
Tank Capacity	195 L
Sound Pressure @ 7 meters	73 dB(A)

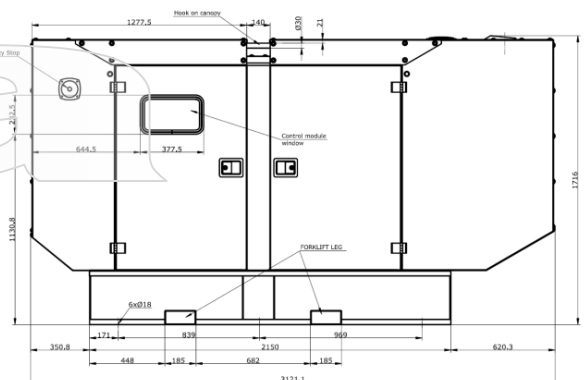

*Manufacturer reserves the right to make changes in model, technical specifications, color, equipment and accessories without prior notice.



Standard Features & Accessories

- ✓ Heavy Duty Steel Base Frame
- ✓ Integral Fuel Tank
- ✓ Fuel Drain Plug
- ✓ Control Panel Window
- ✓ Engine Jacket Water Heater
- ✓ Battery and Battery Rack
- ✓ Battery Charger
- ✓ Radiator fill cap on enclosure
- ✓ Anti Vibration Pads between Engine/Alternator & Base Frame
- ✓ Residential Grade Silencer Inside Enclosure
- ✓ Industrial Grade Silencer Set for Open Skid Sets
- ✓ Sound Absorb Foam for Enclosure
- ✓ Air Inlet & Outlet Rodent Guards
- ✓ Oil Drain Valve
- ✓ Coolant Drain Valve
- ✓ Flex Fuel Lines
- ✓ Air Filter Restriction Gauge
- ✓ Engine Manifold Cover
- ✓ Turbocharger Cover
- ✓ Protection Covers for Rotating Parts
- ✓ Exhaust Insulation Cover
- ✓ Control Panel Window
- ✓ Operations Manual
- ✓ 24 Months / 2000 hours Limited Standby Warranty

Optional Accessories

- Main Line CB (3 / 4 Poles)
- PMG
- Voltage Regulation $\pm 0.5\%$ w/MX321 AVR
- Anti-condensation Heater
- Double Wall Base Fuel Tank
- Fuel Level Display & Alarm on Controller
- Low / High Fuel Alarms
- Fuel Water Separator Filter
- Auto Fuel Fill Control System
- Oil Temperature Display on Controller
- Manual Speed Adjust Rheostat
- Manual Voltage Adjust Rheostat
- Remote Annunciator Panel
- Remote Control & Monitoring Panel
- Advanced SMS Messaging
- Control Panel Heater
- Battery Disconnect Switch
- Battery Heater
- 10A Battery Charger
- Battery Charge Ammeter
- Tool Kit for Maintenance
- Power Plug Outlet Kit
- Automatic Transfer Panel (ATS) – Contactor Design
- Automatic Transfer Panel (ATS) – Changeover Design

*Manufacturer reserves the right to make changes in model, technical specifications, color, equipment and accessories without prior notice.

Aksa Power Generation USA
 371 Exchange Street, West Monroe, LA 71292
 T: + 1 318 8558377
 sales@aksausa.com

**Aksa Power Generation
 USA & LATAM**
 a member of



KAZANCI HOLDING

Aksa Power Generation LATAM
 12320 NW 116th Street, Miami, FL 33178
 T: + 1 786 4936857
 sales@aksausa.com